

BSPT THREADED ELBOW FLANGES



SAE J518 61 SERIES / ISO6162-1 PATTERN

FLANGE SIZE	PIPE SIZE	PART NUMBER	A	B	C	D	E	F	Gmm Jmm	H	K NPTF	MOUNTING KIT®			WT
									PART NO.			SCREW SIZE	O-RING		
1/2	1/2	6363-08-08BM8	2.00	2.12	1.44	1.500	.688	.50	8.5	.75	1/2	MKM 541	M8 x 50	210	1.5
		6364-08-08BM8							M8x1.25			-----	-----	---	
3/4	3/4	6363-12-12BM10	2.50	2.62	1.70	1.875	.875	.75	10.5	.88	3/4	MKM 542	M10 x 60	214	2.6
		6364-12-12BM10							M10x1.5			-----	-----	---	
1	1	6363-16-16BM10	3.00	2.82	1.94	2.062	1.031	1.00	10.5	1.00	1	MKM 543	M10 x 65	219	3.5
		6364-16-16BM10							M10x1.5			-----	-----	---	
1 1/4	1	6363-20-16BM10†	3.50	3.19	2.40	2.312	1.188	1.25	10.5	1.25	1	MKM 4532	M10 x 75	222	6.5
		6364-20-16BM10†							M10x1.5			-----	-----	---	
1 1/4	1 1/4	6363-20-20BM10†	3.50	3.19	2.40	2.312	1.188	1.25	10.5	1.25	1 1/4	MKM 4532	M10 x 75	222	6.0
		6364-20-20BM10†							M10x1.5			-----	-----	---	
1 1/2	1 1/4	6363-24-20BM12‡	4.00	3.75	2.90	2.750	1.406	1.50	13.0	1.38	1 1/4	MKM 4533	M12 x 90	225	10.0
		6364-24-20BM12‡							M12x1.75			-----	-----	---	
1 1/2	1 1/2	6363-24-24BM12‡	4.00	3.75	2.90	2.750	1.406	1.50	13.0	1.38	1 1/2	MKM 4533	M12 x 90	225	9.5
		6364-24-24BM12‡							M12x1.75			-----	-----	---	
2	1 1/2	6363-32-24BM12‡	4.50	4.00	2.96	3.062	1.688	1.94	13.0	1.62	1 1/2	MKM 4547	M12 x 90	228	10.5
		6364-32-24BM12‡							M12x1.75			-----	-----	---	
2	2	6363-32-32BM12‡	4.50	4.00	2.96	3.062	1.688	1.94	13.0	1.62	2	MKM 4547	M12 x 90	228	10.9
		6364-32-32BM12‡							M12x1.75			-----	-----	---	
2 1/2 ②	2 1/2	6363-40-40BM12‡	5.00	4.50	3.96	3.500	2.000	2.44	13.0	2.00	2 1/2	MKM 4535	M12 x 120	232	17.5
		6364-40-40BM12‡							M12x1.75			-----	-----	---	
3 ③	3	6363-48-48BM16	6.00	5.31	4.46	4.188	2.438	2.94	17.0	2.25	3	MKM 2532	M16 x 140	237	26.5
		6364-48-48BM16							M16x2			-----	-----	---	

MOUNTING KITS listed contain carbon steel bolts and Buna N O-Ring. To specify stainless Grade 18-8 bolts, add an SS at the end of the kit number (MK 501SS).

Please note that using stainless steel bolts may reduce the pressure rating of the assembly.

MATERIAL:
304L Stainless

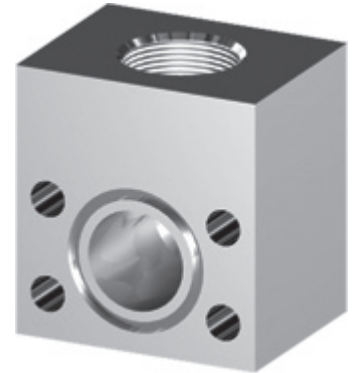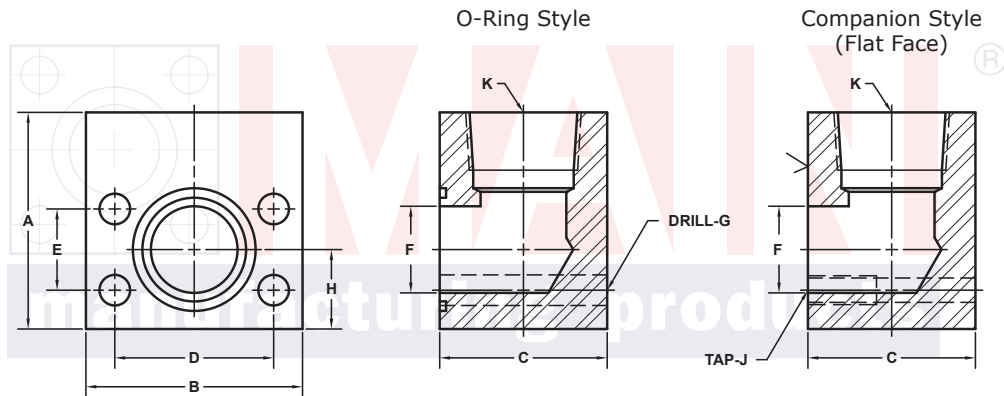

3181 TRI-PARK DR. GRAND BLANC, MI 48439 800-521-7918 810-953-1380 FAX 810-953-1385 INFO@MAINMFG.COM

SAE J518 62 SERIES / ISO6162-2 PATTERN

FLANGE SIZE	PIPE SIZE	PART NUMBER	A	B	C	D	E	F	Gmm Jmm	H	K NPTF	MOUNTING KIT ^①			WT
									PART NO.			SCREW SIZE	O-RING		
1/2	1/2	6365-08-08BM8	2.00	2.22	1.46	1.594	.718	.50	8.5	.88	1/2	MKM 541	M8 x 50	210	1.6
		6366-08-08BM8							M8x1.25			-----	-----	---	
3/4	3/4	6365-12-12BM10	2.50	2.81	1.70	2.000	.937	.75	10.5	1.00	3/4	MKM 542	M10 x 60	214	2.8
		6366-12-12BM10							M10x1.5			-----	-----	---	
1	1	6365-16-16BM12	3.00	3.19	1.96	2.250	1.093	1.00	12.5	1.12	1	MKM 551	M12 x 70	219	4.4
		6366-16-16BM12							M12x1.75			-----	-----	---	
1 1/4	1 1/4	6365-20-20BM12‡	4.00	3.75	2.44	2.625	1.250	1.25	13.0	1.38	1 1/4	MKM 578	M12 x 80	222	8.2
		6366-20-20BM12‡							M12x1.75			-----	-----	---	
1 1/2	1 1/2	6365-24-24BM16	4.00	4.50	2.96	3.125	1.437	1.50	17.0	1.62	1 1/2	MKM 553	M16 x 100	225	12.0
		6366-24-24BM16							M16x2			-----	-----	---	
2	2	6365-32-32BM20	5.00	5.25	3.46	3.812	1.750	1.94	21.0	2.00	2	MKM 554	M20 x 120	228	20.0
		6366-32-32BM20							M20x2.5			-----	-----	---	
2 1/2	2 1/2	6365-40-40BM24	6.00	6.88	4.00	4.875	2.312	2.44	25.5	2.50	2 1/2	MKM 555	M24 x 140	232	37.9
		6366-40-40BM24							M24x3			-----	-----	---	
3	3	6365-48-48BM30	7.00	8.50	5.00	6.000	2.812	2.94	33.0	3.00	3	MKM 556	M30 x 180	237	64.0
		6366-48-48BM30							M30x3.5			-----	-----	---	

① Order Separately

② 2500 PSI Max

③ 2000 PSI Max

NOTE: DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED. † Also Available for M12 Bolts ‡ Also Available for M14 Bolts

© Copyright MAIN Mfg. 2017